




Cantilever Conveyor

**Model Numbers:
CRC4, CRC5, CRC6, CRC7, CRC8,
CRC10**

With Alluserv you are not just buying a product. You are receiving our team's service commitment to get the most value from your investment in our products. We will provide you with:

- A team of knowledgeable experts with over 100 years of combined experience to help you understand and receive the most from your product throughout its service life
- Detailed instructions and specification on cleaning and application to best maintain your equipment
- A national service network and service manuals for our extensive product offering.

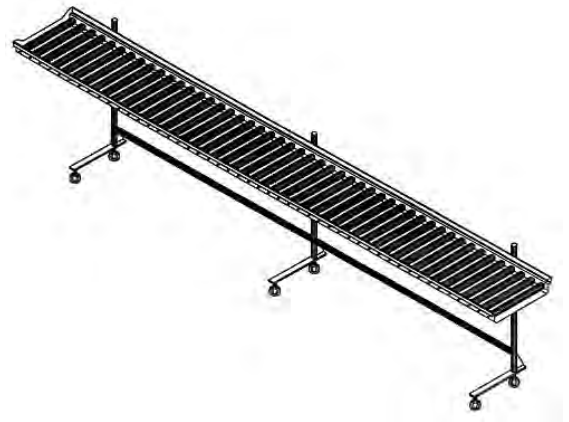

CANTILEVER CONVEYOR

APPLICATION

The straight-line cantilever conveyor is designed for tray make-up operations. The cantilever conveyor will help streamline tray assembly for any healthcare operations. This model unit is designed for easy cleaning and long life. Please consult factory for specific questions.

CONSTRUCTION

The cantilever conveyor consists of a standard conveyor pan and standard roller assemblies. The cantilever conveyor uprights are made of 2" (4cm) diameter, durable, 16-gauge stainless steel tube. Two uprights are required for a conveyor up to 6' in length, three uprights are required for conveyors over 6' long to ensure ample support. Uprights have 1 1/4" (3cm) 18-gauge stainless steel cross rails welded between for support and each upright has a 12-gauge stainless steel fully welded gusset for support. Pan Support consists of a 14-gauge stainless steel tube that slides over upright making an adjustable conveyor height. Conveyor is adjustable for most ergonomic working heights. Casters are 3" (8cm) diameter swivel plate-type (2 of 4 or 3 of 6) have breaks to ensure the conveyor stays in place during operations.

Cantilever Conveyor

Standard Features

- S/S Uprights and Frame
- 3" Diameter Casters
- Adjustable height

Options

- Electric Raceways – All units can be equipped with electric raceways for your electrical convenience.
- Outlets – Allows you to plug in all support equipment. No more drop cords. Single or three phase outlets are available in either straight blade or twist lock.
- Field Joint – Allows longer conveyors to be shipped and maneuvered to location in smaller sections.
- Removable Sections - Allows sections to be placed directly into dishwasher for easy cleaning.
- Cord & Plug – Conveyors are constructed for hard wiring as standard, requiring electrical service at location. Ground receptacle required for this option. This option is available on any unit with electric amp load of 100 or less.
- Stainless Steel Rollers

Warranty

- Two years parts and one year labor

DIMENSIONS

MODEL	A DIM	WIDTH	CASE WEIGHT
CRC04	4 ft.	Tray size plus 1/2 inch	90 lbs
CRC05	5 ft.	Tray size plus 1/2 inch	110 lbs
CRC06	6 ft.	Tray size plus 1/2 inch	130 lbs
CRC07	7 ft.	Tray size plus 1/2 inch	150 lbs
CRC08	8 ft.	Tray size plus 1/2 inch	170 lbs
CRC10	10 ft.	Tray size plus 1/2 inch	190 lbs

